TO6T90"h6E58860

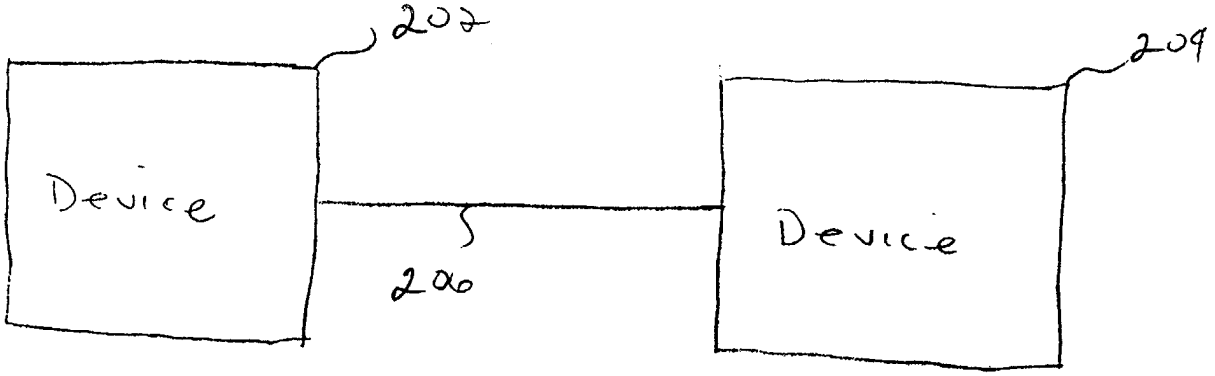

Figure 2

200

Figure 1

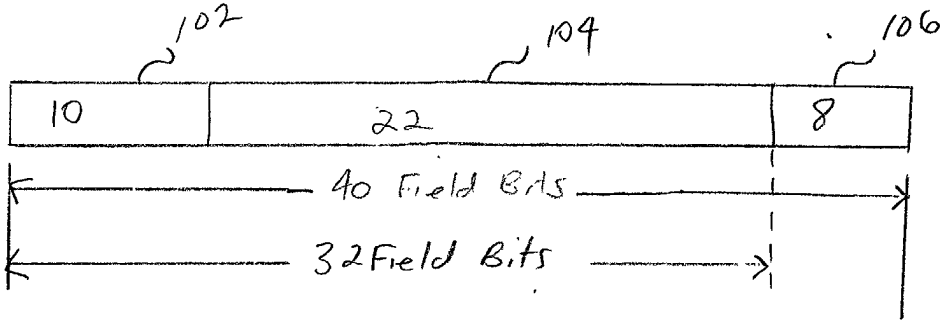

100

Figure 3.

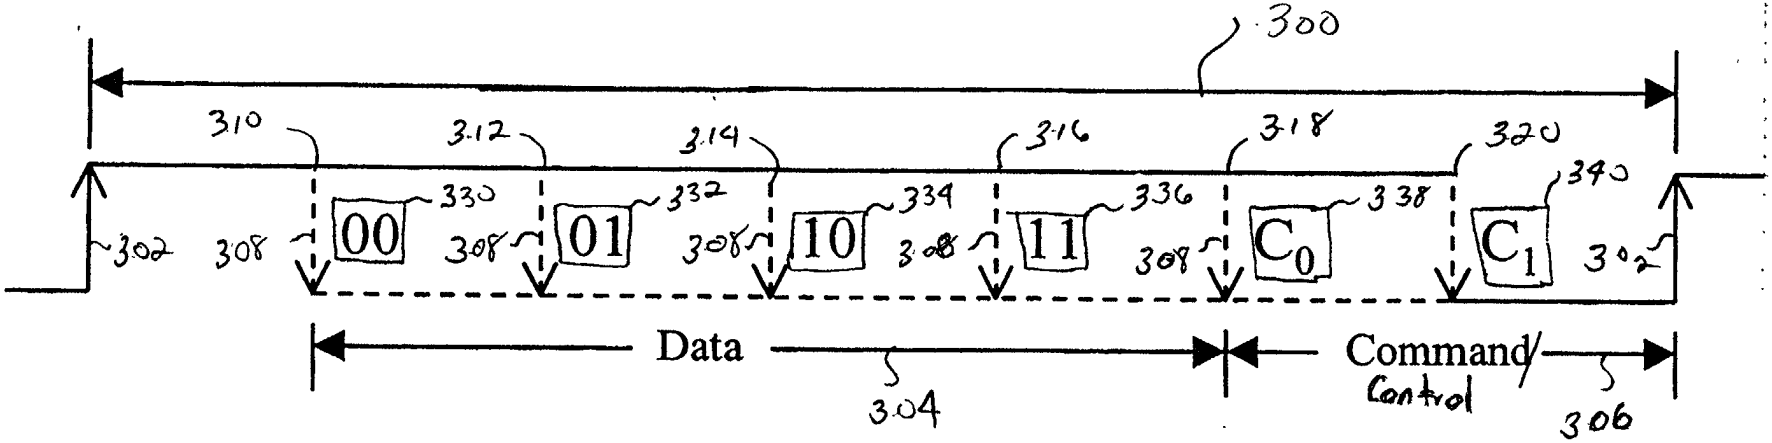

Figure 4

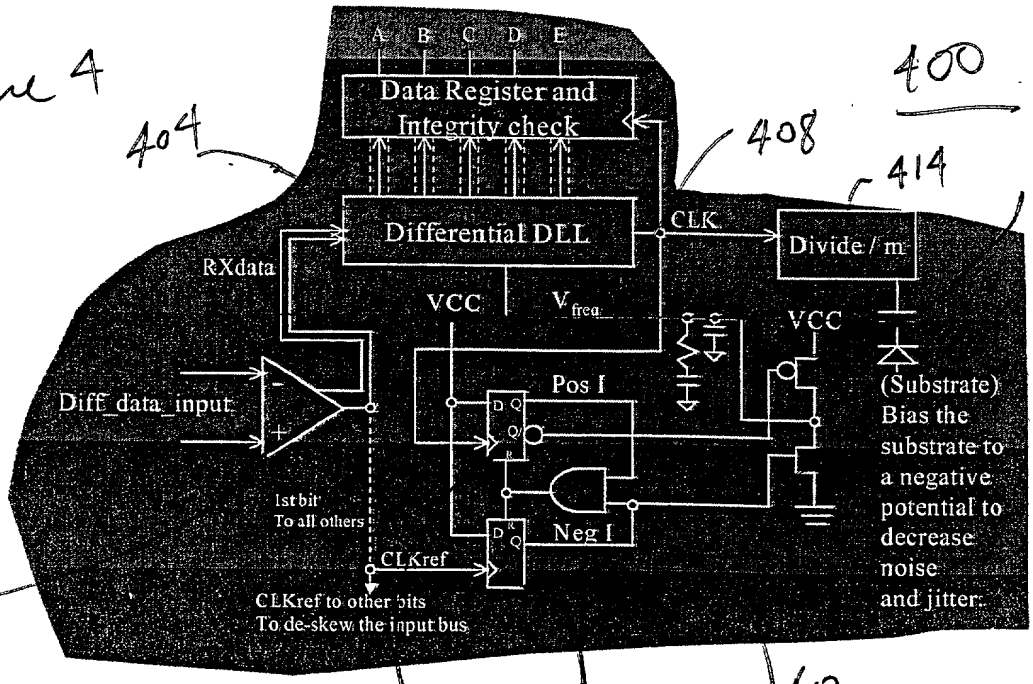

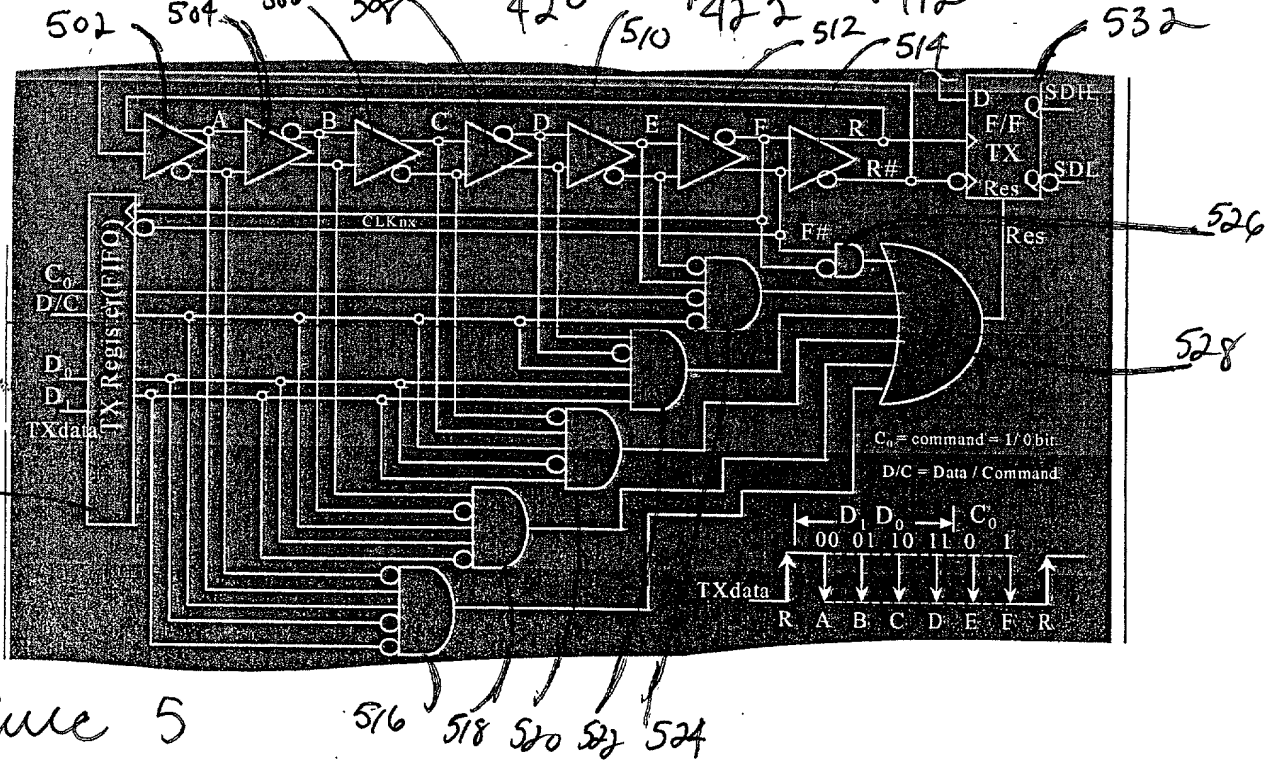

Figure 5

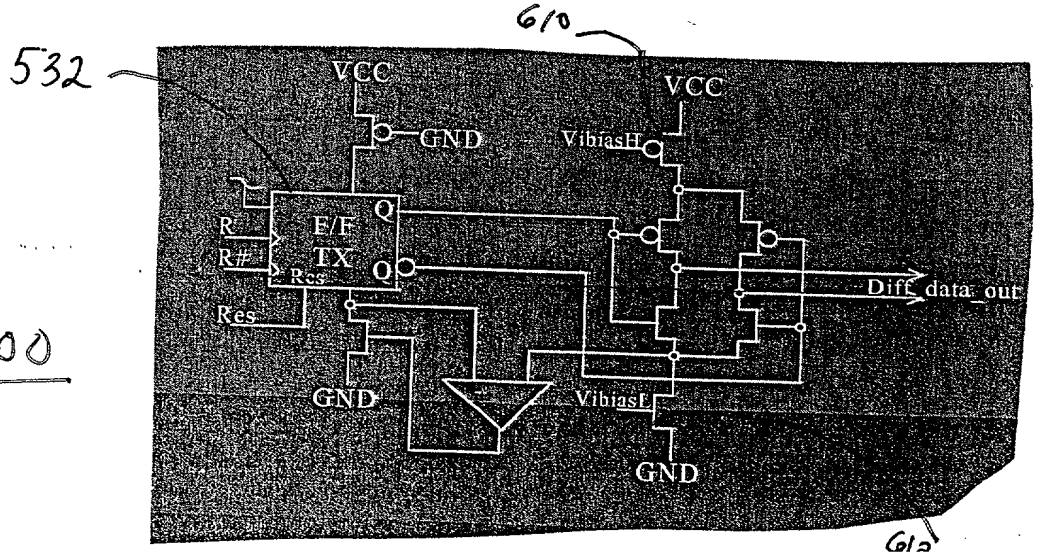

Figure 6

600

US 6,895,504 B2

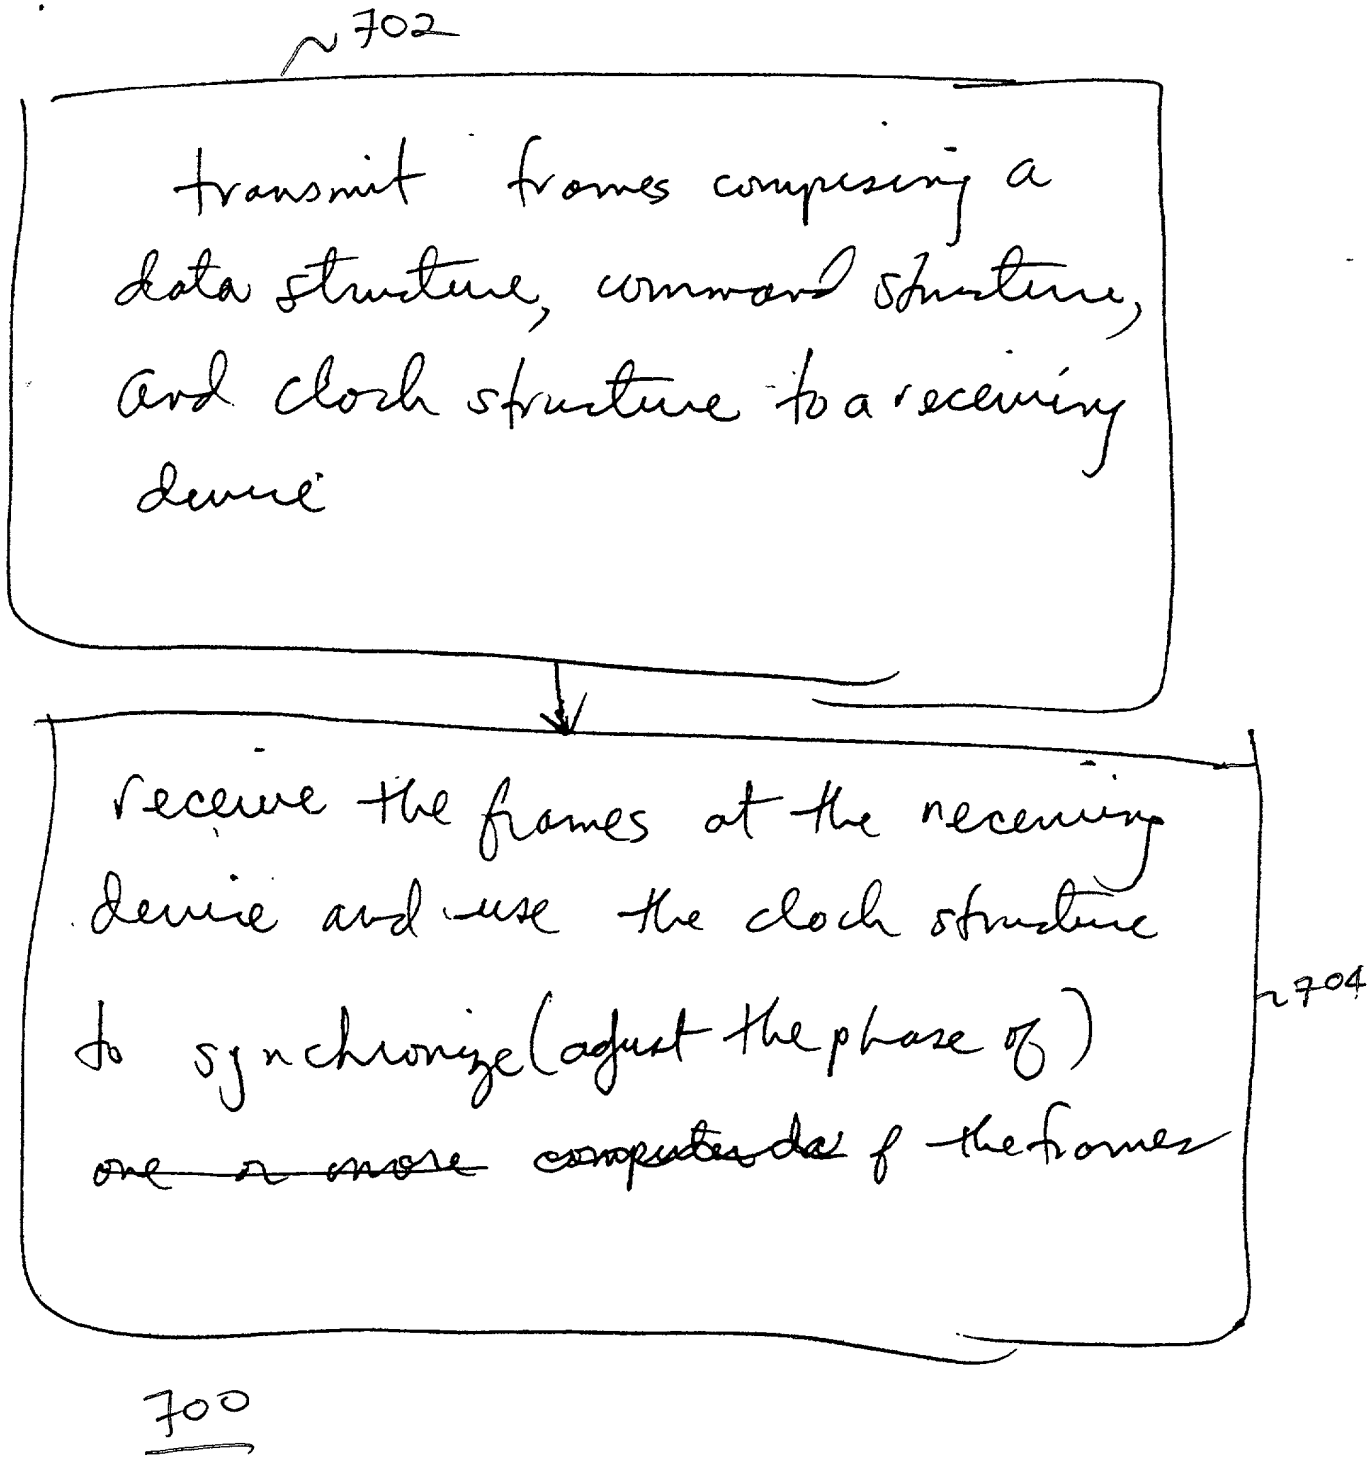
702
transmit frames comprising a data structure, command structure, and clock structure to a receiving device
receive the frames at the receiving device and use the clock structure to synchronize (adjust the phase of) ~~one or more~~ ~~computer~~ of the frames
704
700

Figure 7